



HYPERCOLOR G12 - CERAMIC BURNER

Typology

Discharge lamps.

Features

Product reliability. This is what the entire range of Duralamp discharge lamps has in common.

Used in technical and professional installations where relamping is often difficult, discharge lamps must be lamps you can depend upon.

Notes

The HYPERCOLOR range with ceramic burners: excellent control of colour uniformity, colour rendering and colour stability over time.



Characteristic data

Power	150 W	Dimmable	No	Input	93 Vac	Base	G12
IP	20	Flux	13000 lm	Tc	4200 K	Ra	>90

Dimensional characteristics

ø	30 mm
H	105 mm


Lighting and photometric features

Flux	13000 lm
CCT nominal colour temperature	4200 K
Colour rendering index	>90
Lifespan	12000 h
Mercury	9,0 mg

Electrical characteristics

Rated power	150 W
Input voltage	93 Vac
Frequency	50 Hz
Dimmable	No
Input current	1.85 A
Operating temperature	-15°C / +35°C
Operating position	360°

Spectrometry

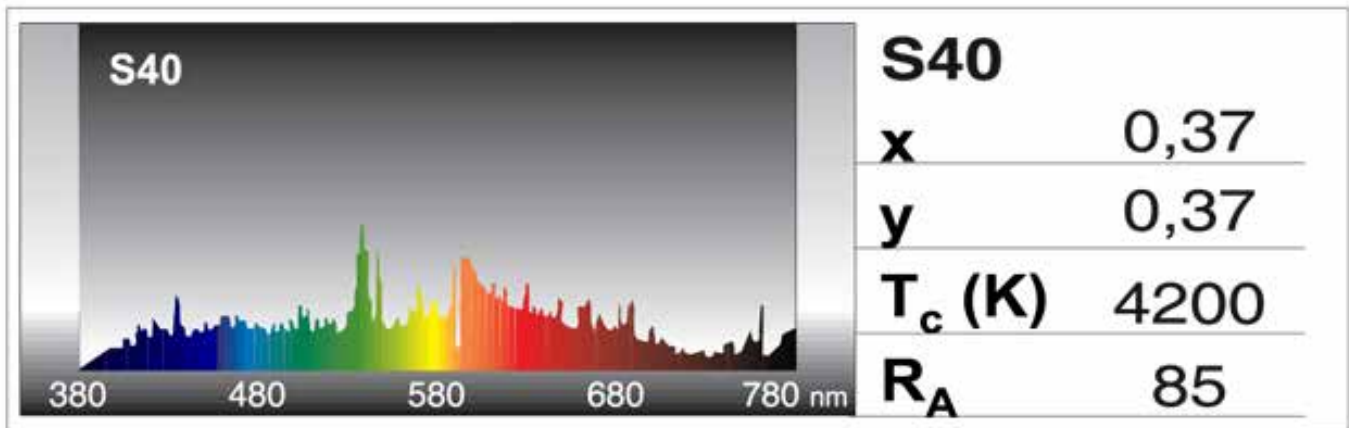

Standards and Directives

2011/65/UE * RoHS	EN 60598-2-1 * anno 1997
2012/19/UE * RAEE	EN 61347-1 * anno 2009 (+A1:2011, +A2:2013)
2014/30/UE * Compatibilità Elettromagnetica	EN 61347-2-13 * anno 2007
2014/35/UE * Bassa Tensione	EN 62031 * anno 2009 (+A1:2013)
EN 61547 * anno 2010	EN 62493 * anno 2010
EN 55015 * anno 2014	EN 62776
EN 61000-3-2 * anno 2007 (+A1/+A2:2011)	Gruppo di rischio 0
EN 61000-3-3 * anno 2014	2010/30/EU * Energy Consumption
EN 62471 * anno 2010	874/2012 * Regulation for Energy Labelling
IEC/TR 62471-2:2009 (CEI 34-141:2012)	2009/125/CE * Progettazione Eco Compatibile
EN 62031 * anno 2009 (+A1:2013)	1194/2012 * Progettazione Eco Compatibile
EN 60598-1 * anno 2009	

Logistics data

Barcode single item	8007753356271
Number of pieces multiple pack	12
Barcode multiple pack	8011905771911